


# BikeYoke REVIVE

POS	part name	qty.
1	barrel nut M5	2
2	REVIVE upper saddle clamp	1
3	REVIVE lower saddle clamp	1
4	saddle clamp bolt M5x30	2
5	set screw M3x0.5x3	1
6	o-ring 5x1	1
7	set screw M4x0.7x5	2
8	REVIVE lever axle	1
9	o-ring 6x1	1
10	REVIVE lever	1
11	REVIVE upper tube	1
12	valve plug	1
13	o-ring 3.5x1	1
14	valve core	1
15	REVIVE valve	1
16	o-ring 2x1.5	1
17	o-ring 13x2/11.5x2	1
18	o-ring 8x1.5	1
19	REVIVE seal head	1
20	spring pin 3x12	1
21	o-ring 8x2	1
22	inner tube	1
23	o-ring 7x2.5	1
24	backup-ring	1
25	main piston	1
26	valve spring	1
27	o-ring 2x1.5 NBR90	1
28	main valve	1
29	piston shaft	1
30	push rod	1
31	o-ring 4x1	1
32	shaft cap	1
33	o-ring 17x2	1
34	shaft bushing	1
35	lower seal head	1
36	u-cup	1
37	wiper /spring loaded wiper	1
38	upper stanchion bushing	1
39	lower tube	1
40	guiding pin	6
41	lower stanchion bushing	1
42	lower stanchion bushing washer	1
43	lower sealhead circlip	1
44	o-ring 18.64x3.53	1
45	foam cover	1
46	o-ring 24x2	1

POS	part name	qty.
47	actuator housing	1
48	actuator lever	1
49	cable stop	1
50	actuator circlip	1
51	spring pin 3x10	2
52	barrel nut	1
53	o-ring 2.5x1.5	1
54	Microvalve	1
55	reset lever	1
56	air adapter (not pictured)	1
57	lower bushing (IGUS)	1

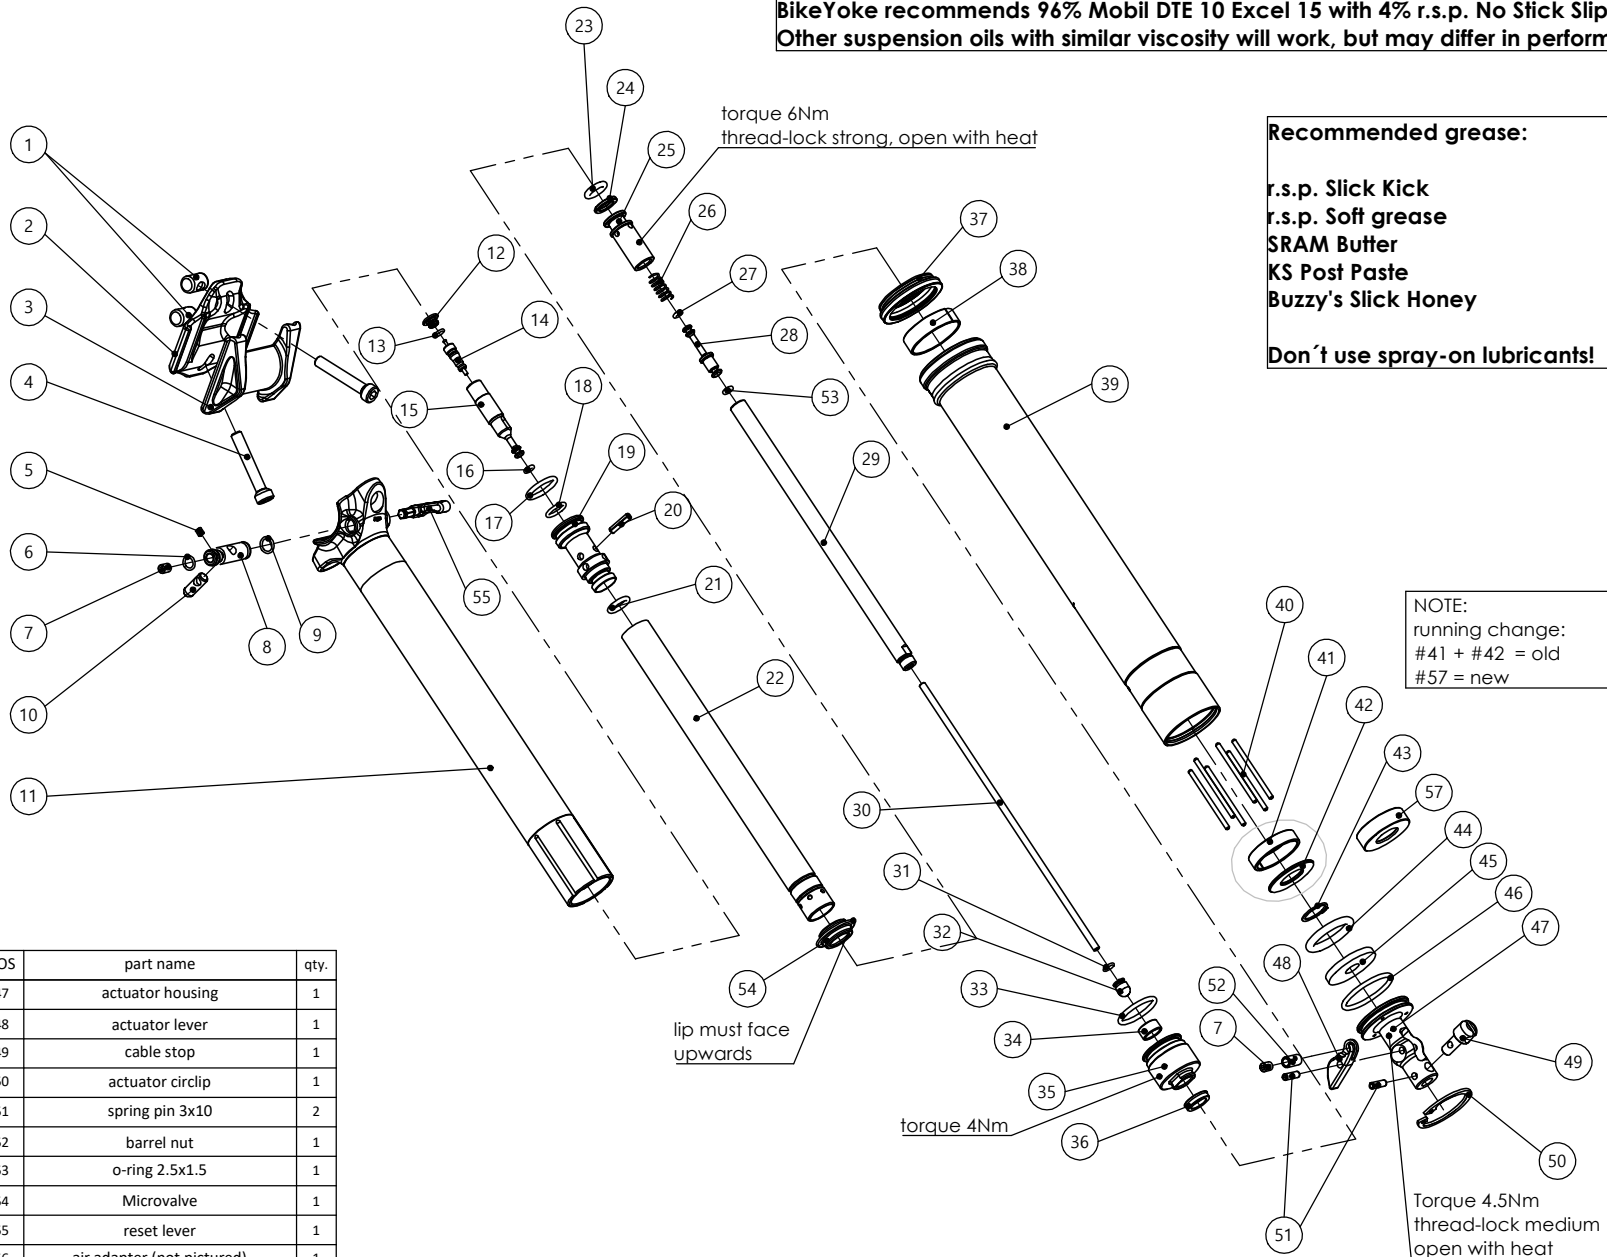

## Cartridge fluid volumes:

125mm = 35ml  
 160mm = 41.5ml  
 185mm = 46ml  
 213mm = 60ml

**BikeYoke recommends 96% Mobil DTE 10 Excel 15 with 4% r.s.p. No Stick Slip.**  
**Other suspension oils with similar viscosity will work, but may differ in performance.**

## Recommended grease:

r.s.p. Slick Kick  
 r.s.p. Soft grease  
 SRAM Butter  
 KS Post Paste  
 Buzzy's Slick Honey

**Don't use spray-on lubricants!**

NOTE:  
 running change:  
 #41 + #42 = old  
 #57 = new

Torque 4.5Nm  
 thread-lock medium  
 open with heat